
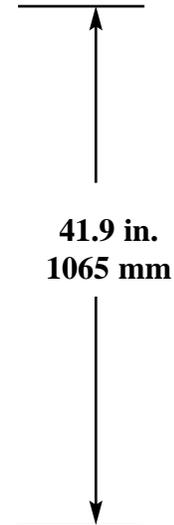


SPECIFICATIONS (See notes 1 and 2)

- Loudspeaker Type:** Ported subwoofer
Operating Range: 40 Hz - 150 Hz
 40 Hz - 150 Hz (+/-5dB)
Max Input Ratings: 300W continuous, 750W program
 35 volts RMS, 77 volts momentary peak
Recommended Power Amplifier: 630W to 900W @ 4 Ohms
Sensitivity 1W/1m: 98 dB SPL (40 Hz - 160 Hz 1/3 octave bands)
Maximum Output: 123 dB SPL / 130 dB SPL (peak)
Nominal Impedance: 4 Ohms
Min Impedance: 4.4 Ohms @ 50 Hz
Nominal -6 dB Beamwidth: 360° H x 360° V
Axial Q / DI: 1 / 0, 40 Hz - 150 Hz
High Pass Output: 150 Hz
Recommended Signal Processing:
 100 Hz - 150 Hz electronic crossover
 30 Hz high pass filter
Drivers: LF (2) 15", Ferrofluid-cooled
Driver Protection: PowerSense™ DDP
Input Connection: (2) Neutrik NL4MP
 (2) 1/4 inch jacks
Controls: None
Enclosure: 13-ply 18 mm Baltic birch, black Polane paint
Enclosure Hardware:
 (2) Steel recessed bar-handles
 (4) Heavy-duty rubber feet
Mounting / Rigging Provisions:
 (6) 3/8-16 rigging points, W.L.L. 150 lb. vertical pull each
Grille: 16 gauge perforated steel, black powder coated
Required Accessories: None
Supplied Accessories: None
Optional Accessories:
 EYBLTKIT: (4) forged 3/8-16 eyebolts
 DSC42: digital system controller
Dimensions:
 Height: 41.9 in. / 1065 mm (41.5 in / 1054 mm w/o feet)
 Width (front): 19.75 in. / 502 mm
 Width (rear): 13 in. / 331 mm
 Depth: 17.9 in. / 455 mm
Weight: 89 lb. / 40.4 kg
Shipping Weight: 100 lb. / 45.4 kg

1. Sensitivity: Free field pink noise measurement at 40 ft. (12.2m) at 20% power; extrapolated to 1 meter and an input of 2 volts RMS.

2. Watts: All wattage figures are calculated using the rated nominal impedance.

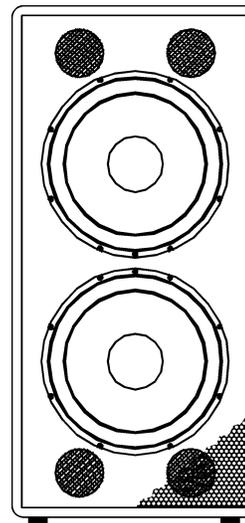

APPLICATIONS:

- Theatres / Auditoria
- Houses of Worship
- Sport Facilities & Health Clubs
- Clubs
- A/V Systems


FEATURES:

- Dual 15" Ferrofluid-cooled Woofers
- Four Ports for Efficient Bass Output
- PowerSense™ DDP Circuit with Front/Rear Indicators
- Tall Low Profile Trapezoidal Enclosure
- Steel Bar-Handles and Input Panel
- Black Paint Exterior


DESCRIPTION

The XLT55E is a versatile high-efficiency subwoofer designed for installation with any of the XLTE full-range loudspeaker systems for extended deep bass output with exceptional punch. The black-painted 13-ply Baltic birch enclosure and black perforated steel grille present an attractive package. The XLT55E subwoofer has an integral 150 Hz high pass output filter that can be used to directly feed XLT41E or XLT42E full range systems, thus requiring only one amplifier channel to power both systems. When used with a larger XLTE full-range system, a separate amplifier channel is recommended for each system. Five year limited warranty.


FREQUENCY RESPONSE

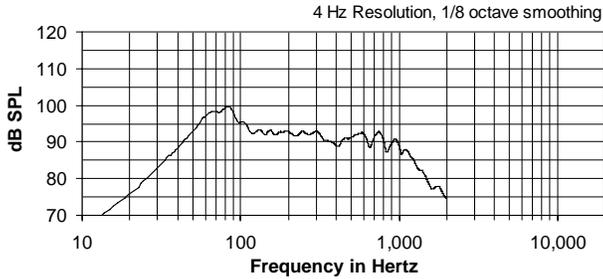

IMPEDANCE

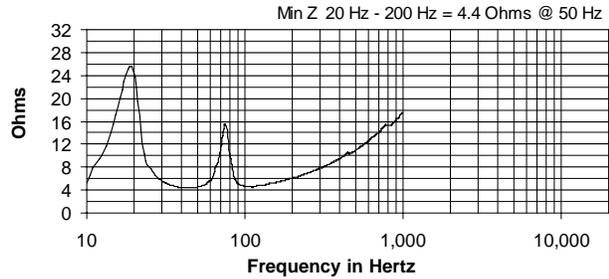

DIMENSIONS

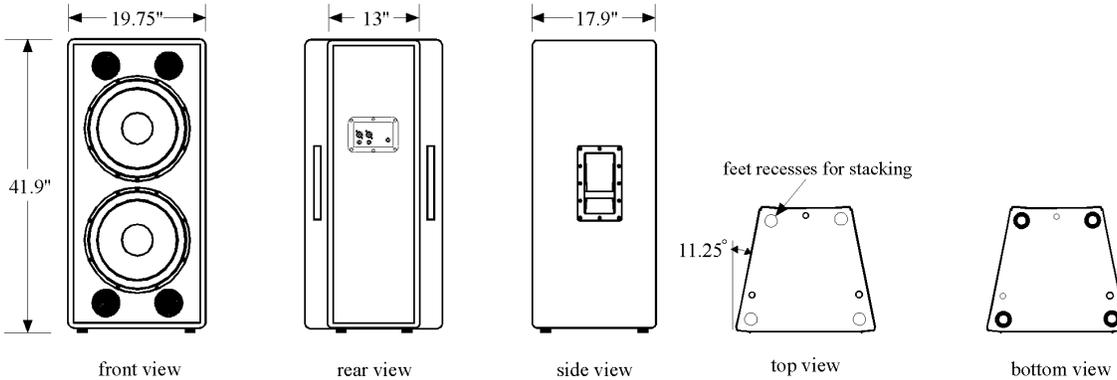

ARCHITECTS' AND ENGINEERS' SPECIFICATIONS

The loudspeaker system shall be a subwoofer of bass reflex trapezoidal design with two 15 in. Ferrofluid-cooled woofers. Drivers shall be connected to integral over-current protection circuitry using high positive current coefficient resistors as well as to an integral high pass filter at 150 Hz connected to high pass output jack. There shall be two NL4MP connectors and two 1/4" phone jack connectors. The loudspeaker enclosure shall be 13-ply Baltic birch plywood with a 16 gauge perforated steel grille finished with black paint. The system shall have an amplitude response of 40 Hz to 150 Hz (+/- 5 dB), input capability of 35V RMS, 98 dB sensitivity at one meter and 2V / 4 ohms nominal impedance. The nominal dispersion shall be omnidirectional throughout the operating range. The loudspeaker shall be 41.9 in. (1065 mm) H x 19.75 in. (502 mm) W (front) x 13 in. (331 mm) W (rear) x 17.9 in. (455 mm) D and weigh 89 lbs (40.4 kg).